

Specifications

Motor

12V DC, 53 RPM, automatic thermal protection, permanent lubrication

Mechanics

- Steel chassis, T-Rail and trolley, full reinforced belt drive mechanism (63:1 gear reduction and adjustable door arm)
- Auto-force adjustment for changing weather and environmental conditions
- Electronic limits for easy setup
- DC Wi-Fi logic board with built-in surge suppressor (for replacement logic boards, order part 030DCT)

Power

120V AC, 60 Hz voltage, 2.7A current rating, UL listed, 6' power cord (3-prong)

Speed

9" per second upward, 6.5" per second downward

Lighting

1,500 lumens with Dual LED

Dimensions

Opener head: 10.5" L x 21.7" W x 8.2" H

Note: when both decorative doors are open, the width of the opener is 30".

Rail Options:	7' (2777)	8' (2778)	10' (2770)
Installed Length:	122.5"	139"	163"
Max Opening:	7' 6"	8' 6"	10' 6"

Headroom clearance required: 2"

Warranties

6 Year: Motor and Belt

1 Year: LED and Parts

1 Year: Battery, Camera and Accessories

Security+ 3.0™

Radio controls:

Operating range up to 1300 ft; Operating temperature: -40F to 150F; One 3-Button Remote Control (L993M). Remote Control Code Format: Security+3.0, premium remote control is backwards compatible to all LiftMaster® openers manufactured since January, 1997; Garage Door Opener Code Format: Security+3.0; Anti-burglary coding.

Encrypted controls:

Motion-Detection Control Panel (L957W); Program remote controls, keypads and myQ accessories; Maintenance Alert System, easy Wi-Fi setup.

myQ® Radio

902-928 MHz 50-channel FHSS (frequently hopping spread spectrum); Provides 2-way communication from garage door opener and myQ accessories; Enables monitoring and control of garage door openers via smartphone or tablet.

HomeLink® compatible (version 4.0 or higher)

Visit HomeLink.com for additional information.

Carton 1 shipping details

Dimensions: 14" x 12" x 11"

Contents: Garage Door Opener Head (6580L), Battery (485LM), Motion-Detection Wall Control Panel (L957W), One 3-Button Remote Control (L993M), The Protector System® Safety Reversing Sensors
Weight: 28 lbs.

Carton 2 shipping details

Dimensions: 10'4" x 5" x 5" (for 7' Rail)

Contents: Assembled Solid Steel Belt T-Rail
Weight: 17 lbs.

Built for you. Installed by pros.

With expert installation, you'll get a perfect fit, safe setup, and full walkthrough of your system. It's the LiftMaster difference: professional quality, professionally installed.



954.946.5555
561.736.5506
BROTTEN.COM

© 2025 The Chamberlain Group LLC. All Rights Reserved.

LiftMaster, the Liftmaster logo, myQ, the myQ logo and Security+ 3.0 are registered trademarks of The Chamberlain Group LLC. UL® and the UL logo are trademarks of UL LLC. Wi-Fi® is a registered trademark of Wi-Fi Alliance. HomeLink® and the HomeLink House® logo are registered trademarks of Gentex Corporation. LMGDENPG6580L_8/25

Plus



Everyday Convenience. Smart Control.

The perfect balance of smart convenience and everyday performance. With quiet operation, enhanced lighting, and built-in myQ® smart control, it's designed to make coming and going feel effortless—every single day.

6580L

1 HPs DC Motor with Integrated Camera, Dual LED, Battery Backup, Wi-Fi®



BROTTEN
GARAGE DOOR SALES
Opening Doors For You Since 1955

954.946.5555
561.736.5506
BROTTEN.COM

LiftMaster

POWERED BY myQ

CGC1514103

*For comparison purposes only; lift capacity similar to 1 horsepower AC motor. Lift capacity of DC motors is typically not measured in horsepower.

Plus

6580L



The LiftMaster 6580L takes the hassle out of your daily routine with a quiet, reliable opener that works when—and how—you need it. Its smooth belt drive and DC motor mean fewer interruptions for your family, while dual LED lighting provides instant visibility the moment you step into the garage. With a 6-year motor and belt warranty for total peace of mind, myQ® connectivity and a built-in adjustable video camera keep an eye on what matters most and check or close your garage from anywhere. The built-in battery backup means you're never stuck outside when the power's out. Thoughtful, dependable, and smart—this is the kind of upgrade that makes every day easier.

Features that matter most

Battery Backup

Keeps your garage working—even when the power goes out.

myQ® Connectivity

Open. Close. Monitor. From anywhere.

Belt Drive + DC Motor

Designed for smooth and ultra-quiet performance.

All-day visibility

Wide-angle, night vision lets you see your garage—day or night.

Warranty

Backed by a 6-year motor and belt warranty for your peace of mind

1 HPs Motor

Designed for high-use garages and harsh conditions.

Dual Lighting

Dual LED Lighting brightens your garage from every angle.

Motion detection

Lights the way automatically for additional safety.

Dual Lighting



Motion-activated Dual LED lighting floods your garage with full, even brightness—engineered for visibility, safety, and hands-free convenience. Its sleek, modern design enhances your space while delivering reliable illumination for everyday use.

360° Adjustable Camera

Monitor your garage in real time with the myQ app and a wide-angle, swivel mounted camera allowing for 360° adjustability and vivid night vision. Enhance everyday visibility and stay connected—wherever you are.

Never locked out

When the power goes out, LiftMaster keeps you moving. With built-in Battery Backup, your garage door continues working—so you're never locked out when it matters most.

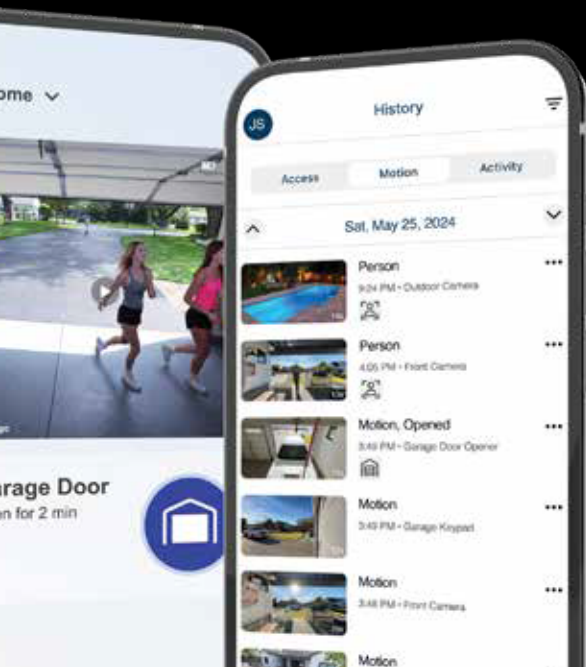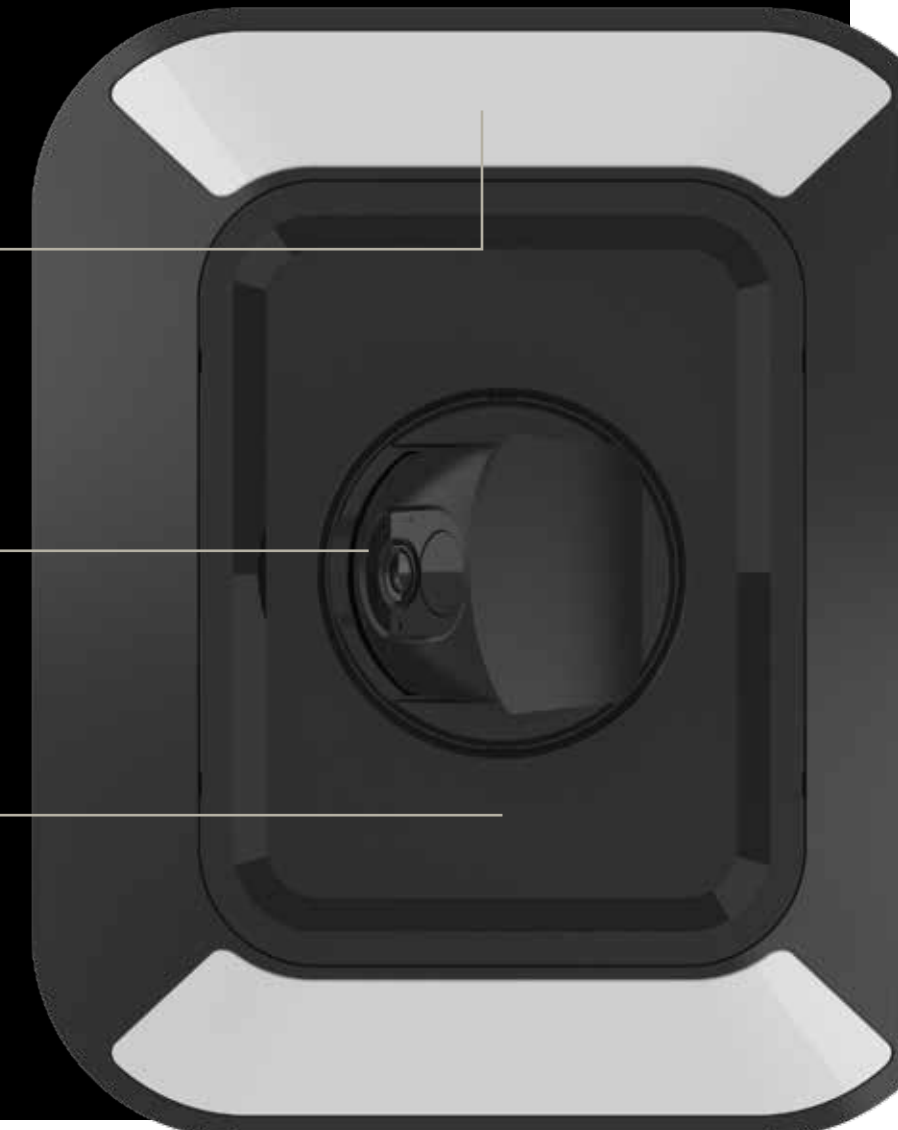

Do more with myQ

Use the myQ app to control, secure and monitor your garage and conveniently share and manage access to your home without sharing passcodes or keys. Also, take the hassle out of service repair and easily connect to a trusted Dealer through the myQ app.



Included in the box



3-Button Remote Control

Operates up to 3 openers or myQ light accessories. Safeguards your home with Security+ 3.0™.

L993M



Motion-Detecting Control Panel

Motion-detecting control panel turns on the garage door opener lights as soon as you walk in.

L957W



Garage Door Opener Battery

Integrated battery back up allows you to open and close your door even when the power is out.

485LM